


KX-ASGB611X-L

Swing Turnstile

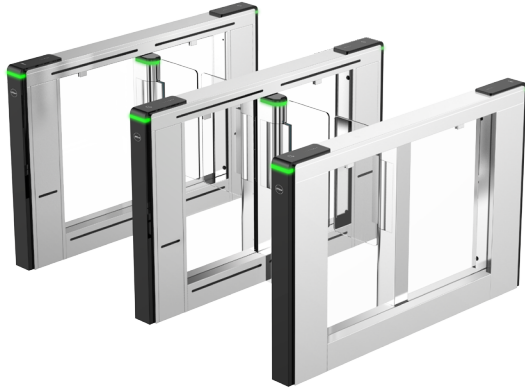

System Overview

ASGB6 series swing turnstile is a passing turnstile that integrates modules such as access control, turnstile control, alarm. The access control management system is equipped with IC card reader.

Scene

Applicable to access control scenes, such as community, school, government, factory, campus, office building.

Technical Specification

Basic

Dimensions	1500 mm × 120 mm × 1000 mm (59" × 4.72" × 39.37") (L × W × H)
Surface Texture	Ink brushed
Casing	SUS304
Barrier	Acrylic
Motor	DC brushless servo motor
IR Detector	12 pairs

Function

Anti-collision	Yes
Anti-pinck	Yes
Memory Mode	Yes

- Barriers will be closed automatically if no one entered the turnstile after the identity is verified.
- Parameters can be restored to default settings.
- The lock and unlock of barriers can be controlled by remote controller (optional).
- Support second unlock and memory mode.
- 4 types of security settings.
- When receiving fire alarm signals, the turnstile will be normally open.
- Support mechanical anti-pinch and IR anti-pinch, anti-collision.
- Support sound and light alarm, volume adjustment and various audio choices.
- 9 passing modes: Pass with identity verified, not allowed to pass, and pass without restrictions, and you can use the three modes in any combination.
- Unlock and lock speed, pass duration, and lock delay duration are adjustable.
- Support intrusion alarm (entering and exiting), trailing alarm, stay overtime alarm, climbing turnstile alarm, unlock anomaly alarm, barrier anomaly alarm, IR anomaly alarm, communication anomaly alarm, and more.
- Support integration of face, fingerprint, QR code, CPU card reader/ID card reader module and more to achieve a combination of multiple authentication methods.

Anti-tailing	Yes
Sound & Light Alarm	Yes
People Counting	Yes
Alarm	Yes
Second Unlock	Yes

Performance

Lock/Unlock Speed	0.5–1.6 s (adjustable)
Pass Duration	2–60 s (adjustable)
Lock Delay Duration	0–60 s (adjustable)
MCBF	≥5 million times
Passing Frequency	20–40 people/minute
Passage Width	Standard: 600 mm Max: 1000 mm

KX-ASGB611X-L

Swing Turnstile

General

Net Weight	75 kg (165.35 lb) (single-motor), 95 kg (209.44 lb) (double-motor)
Gross Weight	115 kg (253.53 lb) (single-motor), 135 kg (297.62 lb) (double-motor)
Power Consumption	≤10W (standby), ≤130W (working)
Packaging	Wooden box
Operating Temperature	-25°C to 70°C (-13°F to 158°F)
Operating Humidity	5%–90% (non-condensing)
Operating Environment	Indoor

Application

