


KX-ASW08-P1

8-Port Fast Ethernet PoE Switch

Design and specifications are subject to change without notice. Pictures in the document are for reference only, and the actual product shall prevail.

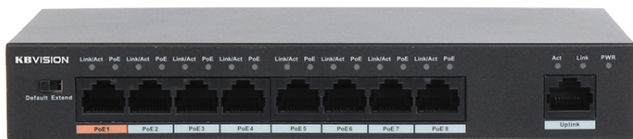

Features

- Layer two commercial switch
- Supports IEEE802.3, IEEE802.3u and IEEE802.3X standards
- MAC auto learning, aging, MAC address capacity is 2K
- Supports MDI/MDIX self-adaptation
- Support PoE, PoE+, Hi-PoE
- Adopts metal enclosure

Technical Specification

| | |
|------------------------|---|
| Ethernet Port | 1*10/100 Base-T 8*10/100 Base-T (PoE power supply) |
| PoE Power Consumption | Port1≤60W, Port2-8≤30W, Total≤96W |
| PoE Protocol | IEEE802.3af (PoE), IEEE802.3at (PoE+), Hi-PoE |
| Switching Capacity | 1.8Gbps |
| Packet Forwarding Rate | 1.34Mpps |
| Packet Buffer Memory | 768K |
| MAC Table Size | 2K |
| Flow Control | Enable by default |
| Application Humidity | 10%~90% |
| Power | DC48~57V power adapter |
| Lightning Protection | Common Mode 2KV Differential Mode 0.5KV |
| Working Temperature | -10°C~+55°C |
| Weight | 0.48kg |
| Dimension(W×D×H) | 190mm×100mm×30mm |