

## KX-VDP01HN

IP Indoor Monitor



### Features


- 7" TFT Resistive touch screen
- IPC surveillance
- Alarm integration
- Micro SD card optional, max 32GB
- Record & Snapshot(SD card needed)



### Technical Specification

<b>Model</b>	<b>KX-VDP01HN</b>
<b>System</b>	
Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS
<b>Video</b>	
Video Compression	H.264
<b>Audio</b>	
Audio Compression	G.711
Audio Input	All-direction Microphone
Audio Output	Built-in Loudspeaker
Bidirectional Talk	Support Dual-way Bidirectional talk
<b>Display</b>	
LCD Screen	7" 800x480, Resisitive
<b>Operation Mode</b>	
Input	Touch buttons
<b>Interface</b>	
Alarm In	6
Alarm Out	1
RS485	1
<b>Network</b>	
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP
<b>General</b>	
Memory Slot	Micro SD, Max 32GB
Installation	Surface
Power	DC 12V
Power Consumption	Standby ≤1.5W, Work ≤7W
Working Temperature	-10°C~+55°C
Relative Humidity	10%~90%RH
Dimensions	200.5mm×136.5mm×22.0mm
Weight	0.8Kg

### Dimensions (mm/inch)

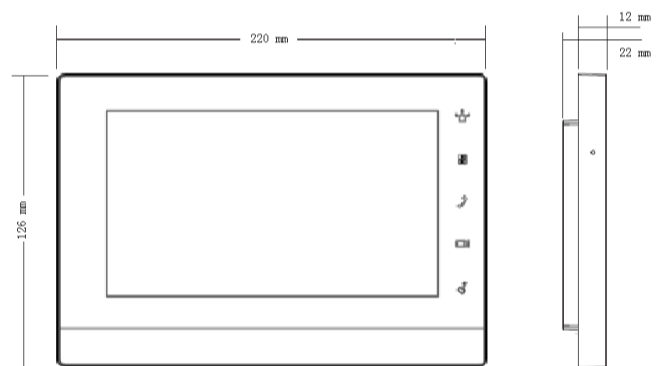

### View Area

